



PROJECT: RENOVATION OF REGISTRAR
 LOCATION: KSU Bulanao Campus, Tabuk City, Kalinga

ITEMS NO.	ITEMS OF WORK	QTY	UNIT	SCOPE OF WORKS
101 (1)	Removal of Structures and Obstruction	1	Lump Sum	- covers item specified at the plan - removed window shall not be damaged
1046 (1) a1	Masonry Works	6.11	sq.m.	- covers item specified at the plan - specs are as follows 4" CHB sand Portland cement no. 16 G.I tie wire
1027 (1)	Cement Plaster Finish	15.06	sq.m.	-covers item specified at the plan - Specs. Are as follows portland cement sand
1018	TILEWORKS	25.276	sq.m.	- covers damaged tiles @ registrar & CR - specs. Are as follows 600mmx600mm Floor tile Tile Grout Fix all portland cement sand Wall Tiles (CR)(600 x 600mm)-Verify Color (KSU Standard) Floor Tiles(CR) (300 x 300mm) Verify Color (KSU Standard)
1003(1)c2	Ceiling	11.296	sq.m	- covers damaged ceiling - specs are as follows 1/4" x 1.2m x 2.4m marine Plywood CW nail x 25
1032 (1)a	Painting Works (Cement/Masonry)	21.114	sq.m	- covers new wall - specs are as follows permanent flat white Final Paint (verify last color) masonry Neutralizer Masonry Putty Acrytint water based roller brush w/ pan roller brush foam paint thinner Sand paper paint brush x 100
1008(1)	Aluminum Powder Coated Window w/ inside steel grills	1	set	Moved to the location specified at the plan
1716(29)b	PAINTING STEEL (CR window Frame)	1	lot	- covers existing window @ CR - clean the frames with steel brush before applying any paint - Specs are as follows metal primer paint brush x 25 QDE Black Paint
1002(8)	PLUMBING FIXTURES	1	Ls	- covers @ CR - Specs are as follows Water closet, flash type, white w/tissue holder & soap holder Floor drain 100x100mm, HD

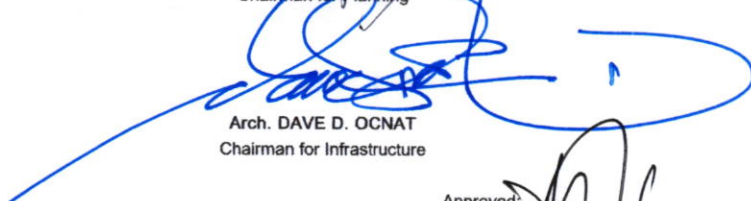
Prepared by:
 KSU INFRA DEPARTMENT


Checked by:

 Engr. CHRISTIAN LOUIE B. ADORA
 Chairman for Planning

Recommending Approval:

 Engr. RHONJHON R. GARMING
 Director for Planning and Strategy


 Arch. DAVE D. OCNAT
 Chairman for Infrastructure

Approved:

 EDUARDO T. BAGTANG, CPA, DBM
 SUC President III



PROJECT: RENOVATION OF REGISTRAR
 LOCATION: KSU Bulanao Campus, Tabuk City, Kalinga

1032(1)b	PAINING WOOD(ceiling,wall)	209.106	sq.m	- covers CR & Registrar - specs are as follows Roller Brush w/ pan Paint Brushx100 Roller Brush foam Paint Thinner Sand Paper Rain or Shine Bridal gown(CR) Final paint (registrar) - verify last color
1010	DOOR w/ lockset	1.4628	sq.m	- Covers CR @ Registrar - Specs are as follows Solid Flush Door (2.12m*.69m)-1set Door Lever Type(satin Finish) Enamel Paint Choco Brown sand Paper #100 Paint Tinner Door jamb (2.12m x .69m)
1200(4)a5	PACKAGE TYPE AIR CONDITIONING UNIT	1.00	set	- specs are as follows 1.5HP Air Conditioning Unit (split type) ACU Wire & Tubing
1200(15)c	CEILING FAN	2.00	SET	- specs are as follows Standard SOF 16B(16" Orbitfan) WITH COMPLETE ACCESORY
1103(1)	Lighting Fixture	5.00	SET	- specs are as follows 40 watts Flourescent lamp-daylight

Prepared by:

KSU INFRA DEPARTMENT

Checked by:

Engr. CHRISTIAN LOUIE B. ADORA
 Chairman for Planning

Arch. DAVE D. OCNAT
 Chairman for Infrastructure

Recommending Approval:

Engr. RHONHON R. GARMING
 Director for Planning and Strategy

Approved:

EDUARDO T. BAGTANG, CPA, DBM
 SUC President III