



Republic of the Philippines  
**KALINGA STATE UNIVERSITY**  
Bulanao, Tabuk City, Kalinga

### SCOPE OF WORKS

Name of Project: CONSTRUCTION AND OR/ REHABILITATION MULTI-PURPOSE INCLUDING PHP 500,000 FOR SPORTS FACILITIES(Phase IIa)  
Location: KSU BULANAO CAMPUS, TABUK CITY, KALINGA


ITEM No.	ITEMS OF WORK	QTY	UNIT	SCOPE OF WORKS
900	CONCRETE WORKS	8.40	cu. m.	-all concrete shall be class A - $f_c' \geq 21$ MPa -slab @ Grid (A-B) (3-5) specs are as follows: *portland cement *sand *gravel 1"
404	REINFORCING STEEL BARS	203.61	kgs.	-all reinforcing bars shall be grade 33 $f_y \geq 276$ Mpa -covers @ Grid (A-B) (3-5) specs are as follows: *GRADE 33 RSB *no. 16 GI Tie wire
1027(1)	CEMENT PLASTER FINISH	210.03	sq.m.	-covers plastering works specified in the plan specs are as follows: *sand *cement

Page 1 of 1


Prepared by:

  
JORDAN S. ESTELONG  
KSU PROJECT IN-CHARGE

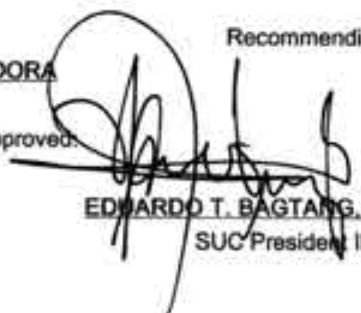
Checked by:

  
Engr. CHRISTIAN LOUIE B. ADORA  
Chairman for Planning

Recommending Approval:

  
Engr. RHONHON B. GARMING  
Director for Planning and Strategy

Approved:

  
EDWARDO T. BAGTANG, CPA, DBM  
SUC President III